




PF

*Presse Plieuse
Hydraulique
Synchronisée*



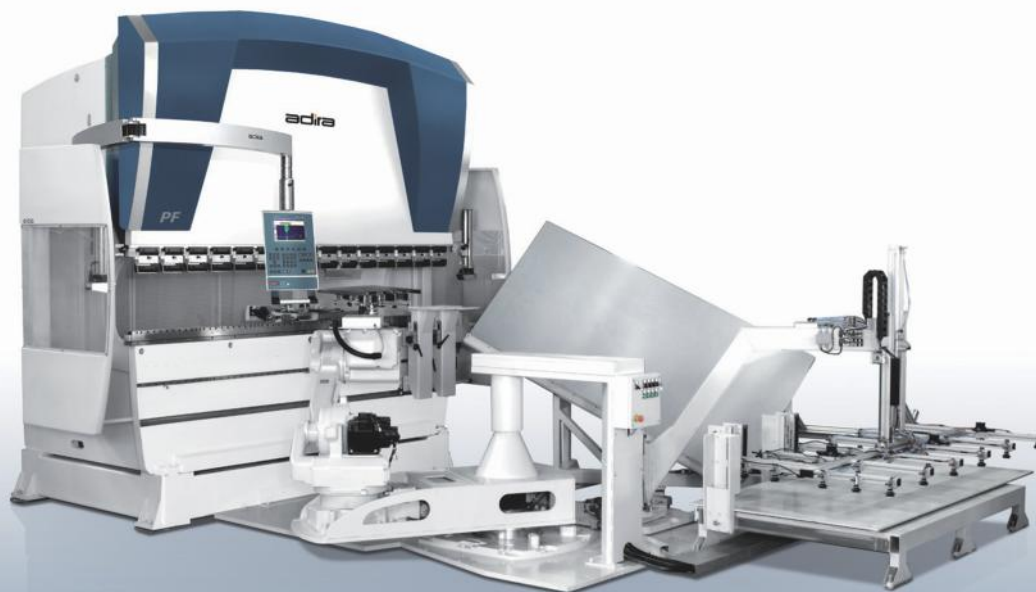

CELLULE ROBOTISEE DE PLIAGE

Modèle PF		6020	9025	13530	16030	16040	22030	22040							
Capacité de pliage	kN	600	900	1350	1600	1600	2200	2200							
Longueur utile	mm	2000	2500	3000	3000	4000	3000	4000							
Distance entre montant	mm	1550	2050	2550	2550	3150	2550	3150							
Course	mm	400	400	400	400	400	400	400							
Ouverture sans outils	mm	630	630	630	630	630	630	630							
Col de cygne	mm	320	320	320	320	320	320	320							
Puissance moteur	kW	7.5	11	22	22	22	30	30							
Vit. approche	mm/s	220	220	200	180	200	170	170							
Vit. Travail	mm/s	10/20	10/20	10/20	10/20	10/20	10/20	10/20							
Vit. Retour	mm/s	240	240	200	200	200	170	170							
Course X	mm	625	625	625	625	625	625	625							
Vit. X *	mm/s	800	800	800	800	800	800	800							
Course R	mm	200	200	200	200	200	200	200							
Vit. R	mm/s	200	200	200	200	200	200	200							
Course Z - Z1 / Z2	mm	80 a 1170	80 a 1670	80 a 2170	80 a 2170	80 a 2770	80 a 2170	80 a 2770							
Vit. Z - Z1 / Z2	mm/s	1200	1200	1200	1200	1200	1200	1200							
Course X1	mm	+/- 100	+/- 100	+/- 100	+/- 100	+/- 100	+/- 100	+/- 100							
Vitesse X1	mm/s	100	100	100	100	100	100	100							
Longueur	mm	PLS	NCE	PLS	NCE	PLS	NCE	PLS	NCE	PLS	NCE	PLS	NCE	PLS	NCE
		3280	2200	3780	2700	4300	3200	4300	3200	4820	4200	4300	3200	4820	4200
Profondeur	mm	2030	1600	2030	1610	2030	1620	2030	1620	2030	1620	2030	1620	2030	1620
Hauteur	mm	3200		3360		3380		3380		3380		3380		3380	
Hauteur transport	mm	2800		2950		2980		2980		2980		2980		2980	
Poids	Kg	6000		7000		9000		9200		13200		11900		17100	

* PF PLS

