




GV *Cisaille pour la
tôle épaisse de
grande longueur*



Modèle	ÍNDICO				ATLÁNTICO / PACÍFICO				
	1630	1660	2030	2530	1630	1660	2030	2530	
Capacité de cisailage (Max. angle de coupe)									
Acier doux (45daN/mm2)	mm	16	16	20	25,5	16	16	20	25,5
Acier Inoxydable (70daN/mm2)	mm	10	10	14	17	10	10	14	17
Capacité de cisailage (Std. angle de coupe)									
Acier doux (45daN/mm2)	mm	13	13	16	20	13	13	16	20
Acier Inoxydable (70daN/mm2)	mm	8	8	10	14	8	8	10	14
Longueur de coupe									
Longueur de coupe	mm	3050	6100	3050	3050	3050	6100	3050	3050
Col de cygne	mm	410	410	410	410	410	410	410	410
Angle de coupe									
0,5° en normal	degrées	2,0	1,5	2,0	2,0	2,0	2,0	2,0	2,0
0,5° en max.	degrées	3,5	2,75	3,5	3,5	3,5	3,5	3,5	3,5
Ajustement du jeu entre lames									
Ajustement du jeu entre lames	mm	0,05 - 2,5	0,05 - 2,5	0,05 - 3	0,05 - 3,5	0,05 - 2,5	0,05 - 2,5	0,05 - 3	0,05 - 3,5
Puissance moteur									
Puissance moteur	kW	22	22	30	37	30	30	37	45
Nombre de presse-tôle									
Nombre de presse-tôle	-	16	31	16	16	16	31	16	16
Force des presse-tôle									
Force des presse-tôle	ton	45	79	58	95	45	79	58	95
Longueur butée									
Longueur butée	mm	1100	1100	1100	1100	1100	1100	1100	1100
Coups par minute									
Angle de coupe normal	cuts / min.	13 to 26	60 to 14	10 to 21	8 to 14	16 to 32	8 to 17	13 to 25	9 to 17
Angle de coupe maxi	cuts / min.	8 to 21	4 to 10	7 to 17	5 to 12	10 to 25	5 to 13	9 to 21	6 to 14
Dimensions (CE - configuration)									
Longueur	mm	4150	4240	4170	4250	4150	7240	4170	4250
Profondeur	mm	2370	2370	2370	2370	2370	2370	2370	2370
Hauteur	mm	2550	2770	2550	2730	2550	2770	2550	2730
Poids	Kg	16000	35000	17000	24500	16000	35000	17000	24500

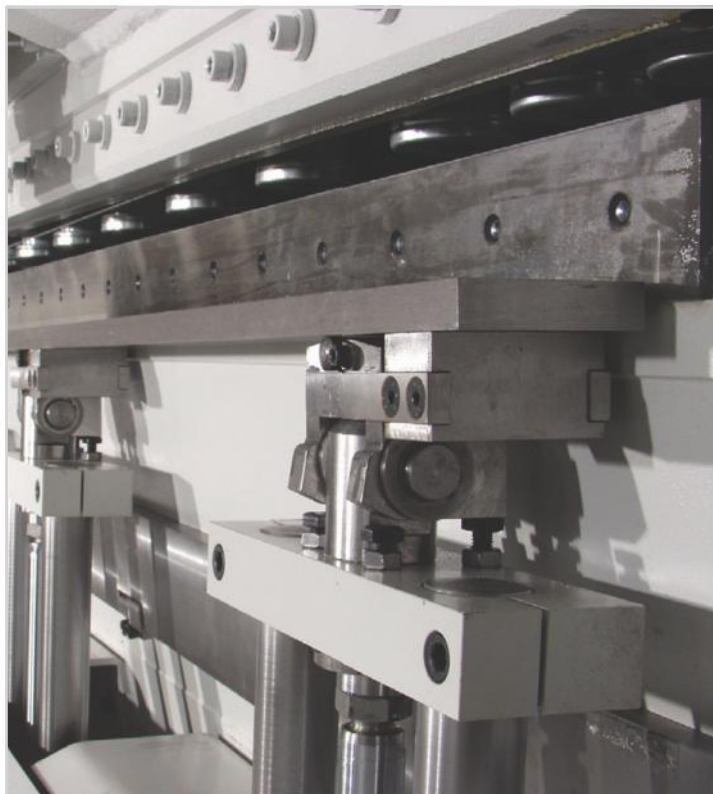

SOCLAFORM Distributeur ADIRA

ZA le terminal
3 rue gracchus Babeuf, 93135
Noisy le Sec Cedex
Tel : 01.48.43.50.50
Fax : 01.48.43.95.99

